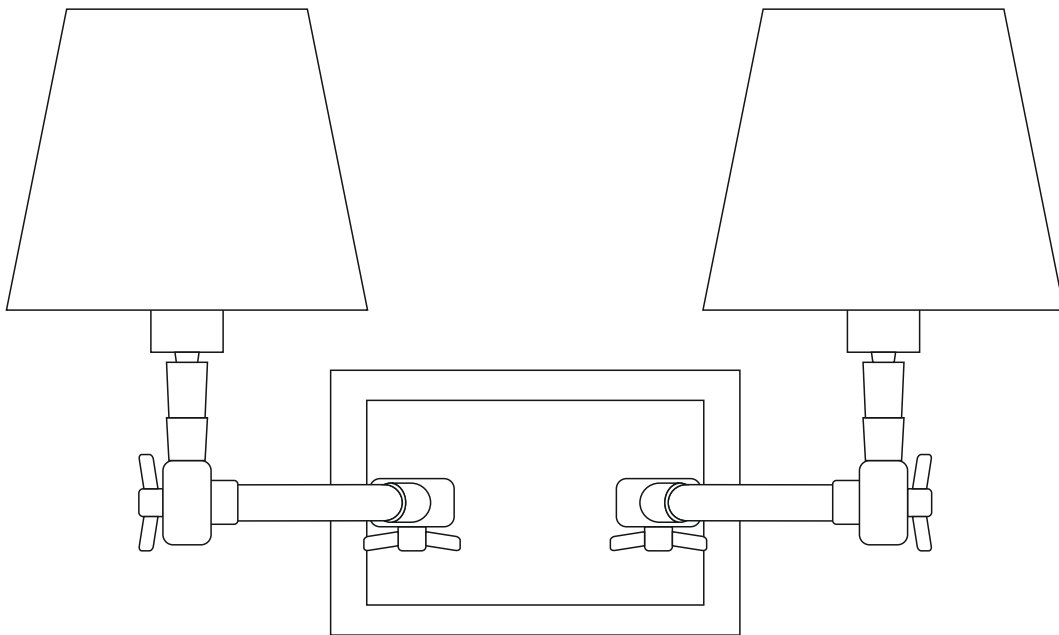


  
**LIGHTING**  
M I N D T H E G A P

**JOYCE DOUBLE ARM SCONCE**  
INSTALLATION GUIDE

---







**IMPORTANT SAFETY INSTRUCTIONS:**

- These instructions are provided for your safety. It is very important that they are properly read completely before beginning the installation of your fixture.
- Turn off power before replacing the bulb, making sure, the bulb had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.


**DIRECT WIRE FIXTURE:**  
**WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN**

**PARTS ENCLOSED**

| Cross Bar (A)                                                                       | Mounting Plate (B)                                                                  | Allen Screw (C)                                                                     | Allen Key (D)                                                                       | Wing Nut (E - F)                                                                      | Screws (G)                                                                            | Quick connector                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |

### TO ASSEMBLE:

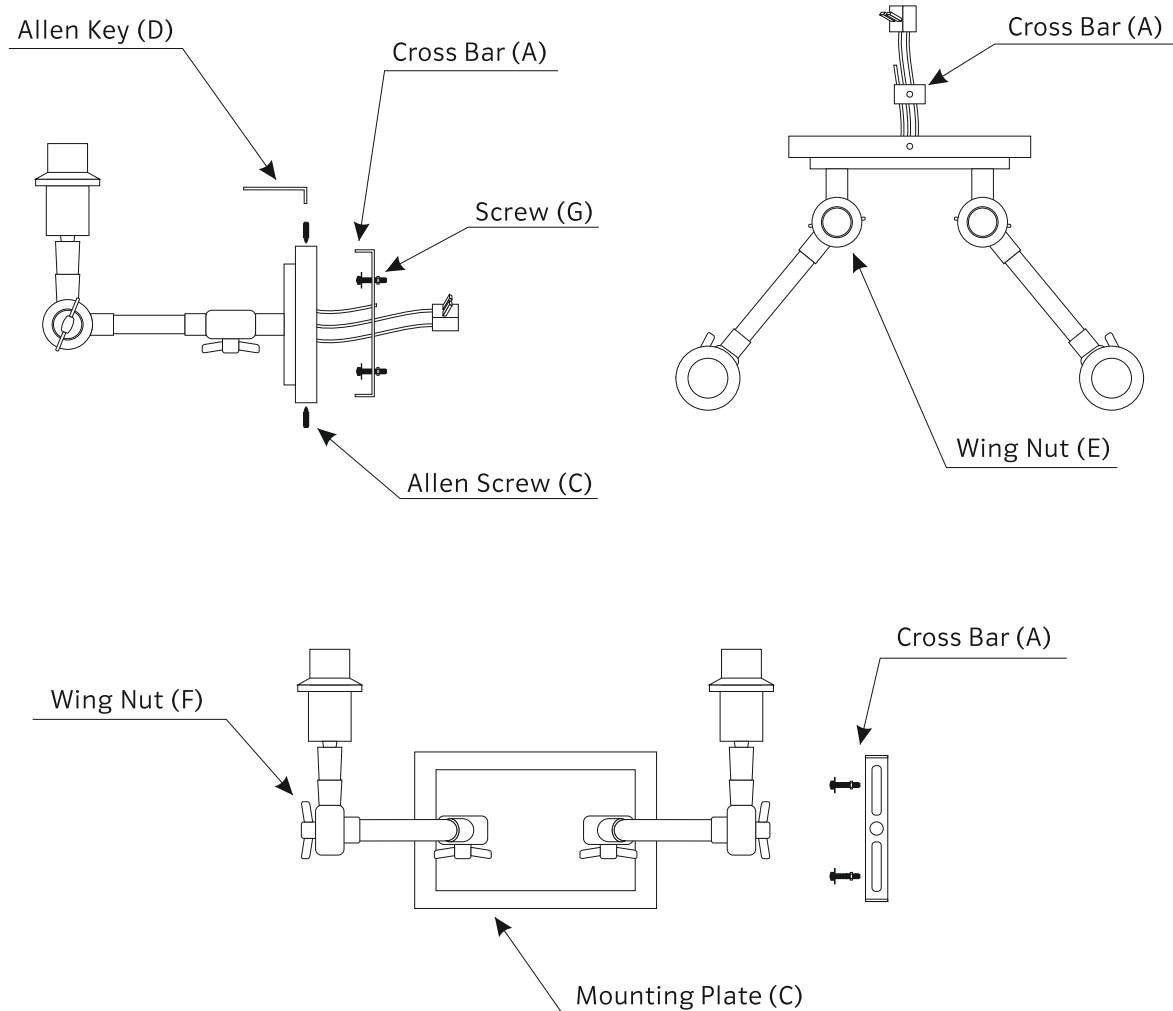- Shut off electrical supply at main fuse box / circuit breaker.
- Remove all parts from carton. Do not throw away any parts.
- Affix the **Cross Bar (A)** directly to the Junction Box using **Screws (G)** provided.
- Assemble the wires at the back of the **Mounting Plate (B)**.
- Connect the grounding wire (silver colored, un-laminated) to the grounding screw in the **Cross Bar (A)**.
- Connect the wires from the sconce to the wires in the junction box, neutral to neutral, live wire to live wire, with plastic wire connectors (not provided) and wrap the wire connector with electrical insulation tape.
- Fix the **Mounting Plate (B)** on the **Cross Bar (A)** by tightening the **Allen Screws (C)** after matching the holes of **Mounting Plate (B)** over the **Cross Bar (A)**.
- To adjust the lamp holders in vertical position loosen and tighten the two **Wing Nuts (F)**.
- To adjust the lamp holder arm in horizontal position loosen and tighten the two **Wing Nuts (E)**.
- Insert 40-watt Type B bulbs (not included) into Threaded sockets.
- Place the shades (not included) onto the holder.
- Installation is complete.



### PLEASE NOTICE!

If the external flexible cable or cord of this wall light is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

### CARE INSTRUCTIONS:

To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.



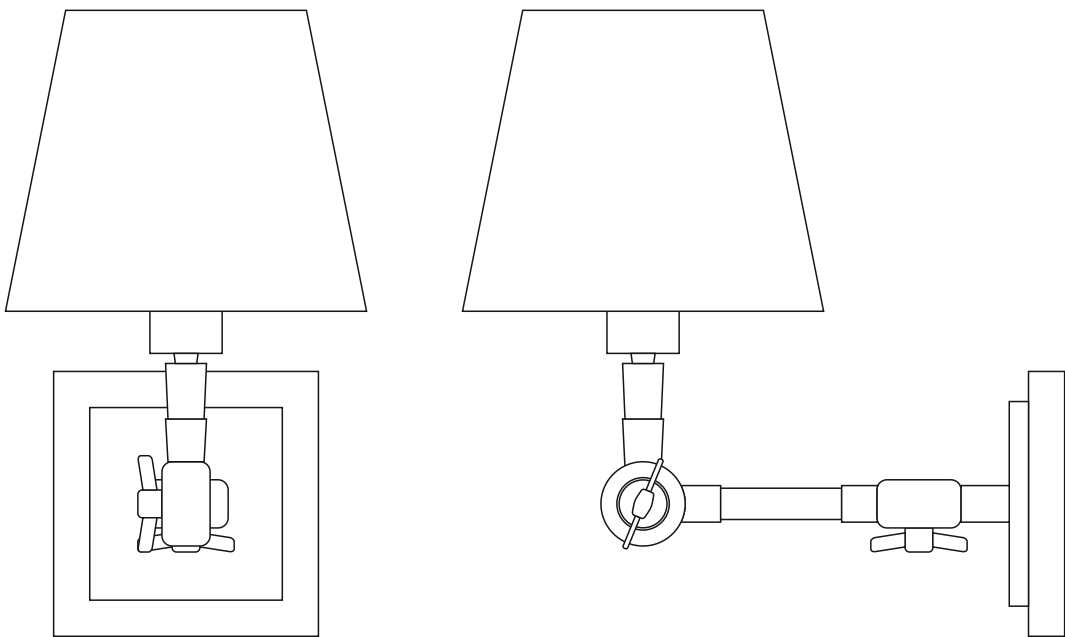
# LIGHTING

M I N D T H E G A P

## JOYCE SINGLE ARM SCONCE

### INSTALLATION GUIDE

---






**IMPORTANT SAFETY INSTRUCTIONS:**

- These instructions are provided for your safety. It is very important that they are properly read completely before beginning the installation of your fixture.
- Turn off power before replacing the bulb, making sure, the bulb had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.


**DIRECT WIRE FIXTURE:**  
**WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN**

**PARTS ENCLOSED**

| Cross Bar (A)                                                                       | Mounting Plate (B)                                                                  | Allen Screw (C)                                                                     | Allen Key (D)                                                                       | Wing Nut (E - F)                                                                      | Screws                                                                                | Quick connector                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |

### TO ASSEMBLE:

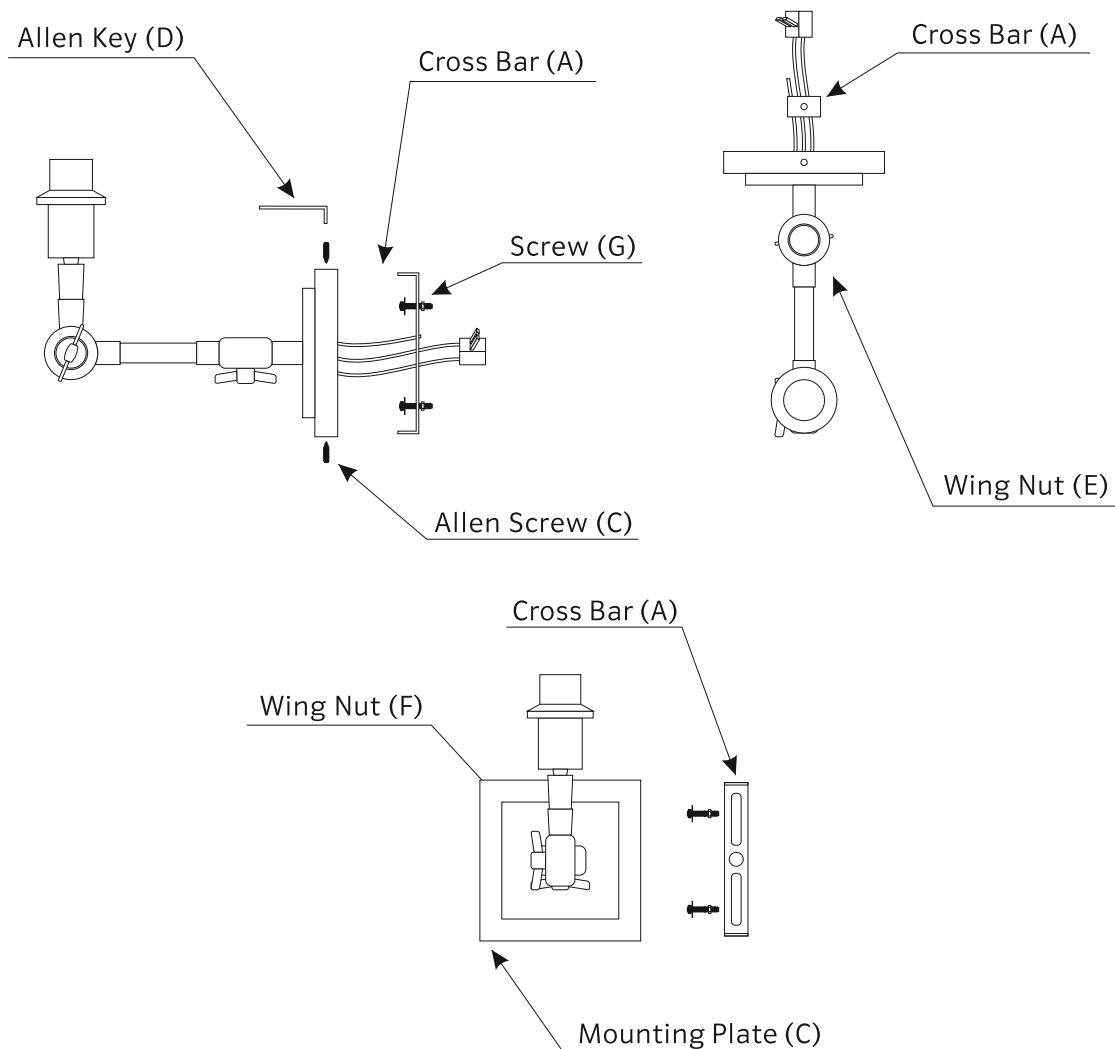- Shut off electrical supply at main fuse box / circuit breaker.
- Remove all parts from carton. Do not throw away any parts.
- Affix the **Cross Bar (A)** directly to the Junction Box using **Screws (G)** provided.
- Assemble the wires at the back of the **Mounting Plate (B)**.
- Connect the grounding wire (silver colored, un-laminated) to the grounding screw in the **Cross Bar (A)**.
- Connect the wires from the sconce to the wires in the junction box, neutral to neutral, live wire to live wire, with plastic wire connectors (not provided) and wrap the wire connector with electrical insulation tape.
- Fix the **Mounting Plate (B)** on the **Cross Bar (A)** by tightening the **Allen Screws (C)** after matching the holes of **Mounting Plate (B)** over the **Cross Bar (A)**.
- To adjust the lamp holders in vertical position loosen and tighten the two **Wing Nuts (F)**.
- To adjust the lamp holder arm in horizontal position loosen and tighten the two **Wing Nuts (E)**.
- Insert 40-watt Type B bulbs (not included) into Threaded sockets.
- Place the shades (not included) onto the holder.
- Installation is complete.



### PLEASE NOTICE!

If the external flexible cable or cord of this wall light is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

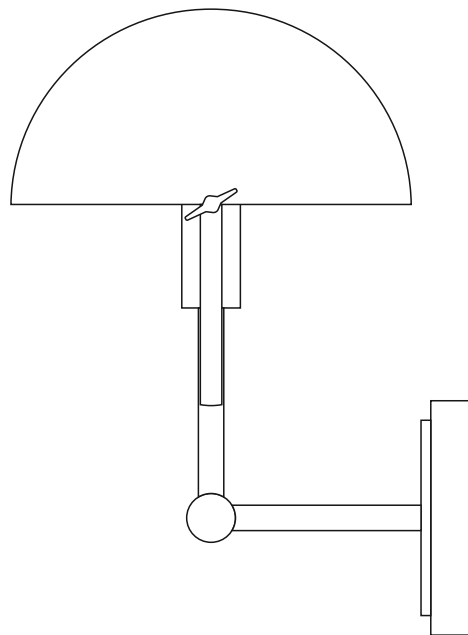
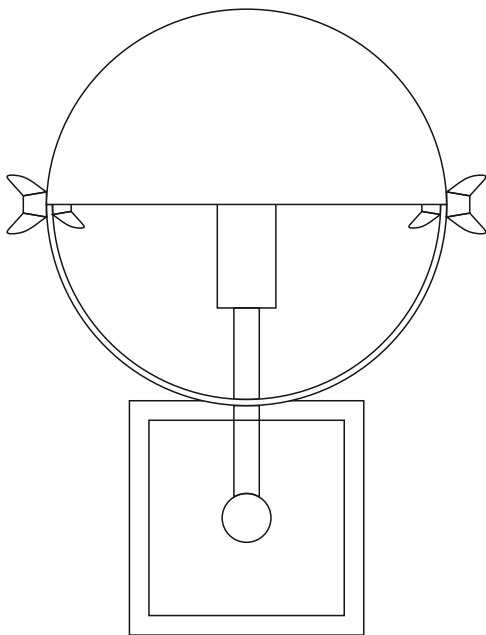
### CARE INSTRUCTIONS:

To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.

  
**LIGHTING**  
M I N D T H E G A P

**QUENTIN SCONCE**  
INSTALLATION GUIDE

---







**IMPORTANT SAFETY INSTRUCTIONS:**

- These instructions are provided for your safety. It is very important that they are properly read completely before beginning the installation of your fixture.
- Turn off power before replacing the bulb, making sure, the bulb had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.

**DIRECT WIRE FIXTURE:**  
**WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN**


**PARTS ENCLOSED**

| Cross Bar (A)                                                                       | Mounting Plate (B)                                                                  | Screws (C)                                                                          | Wing Nut (E - F)                                                                     | Screws (D)                                                                            | Quick connector                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |

---

### TO ASSEMBLE:

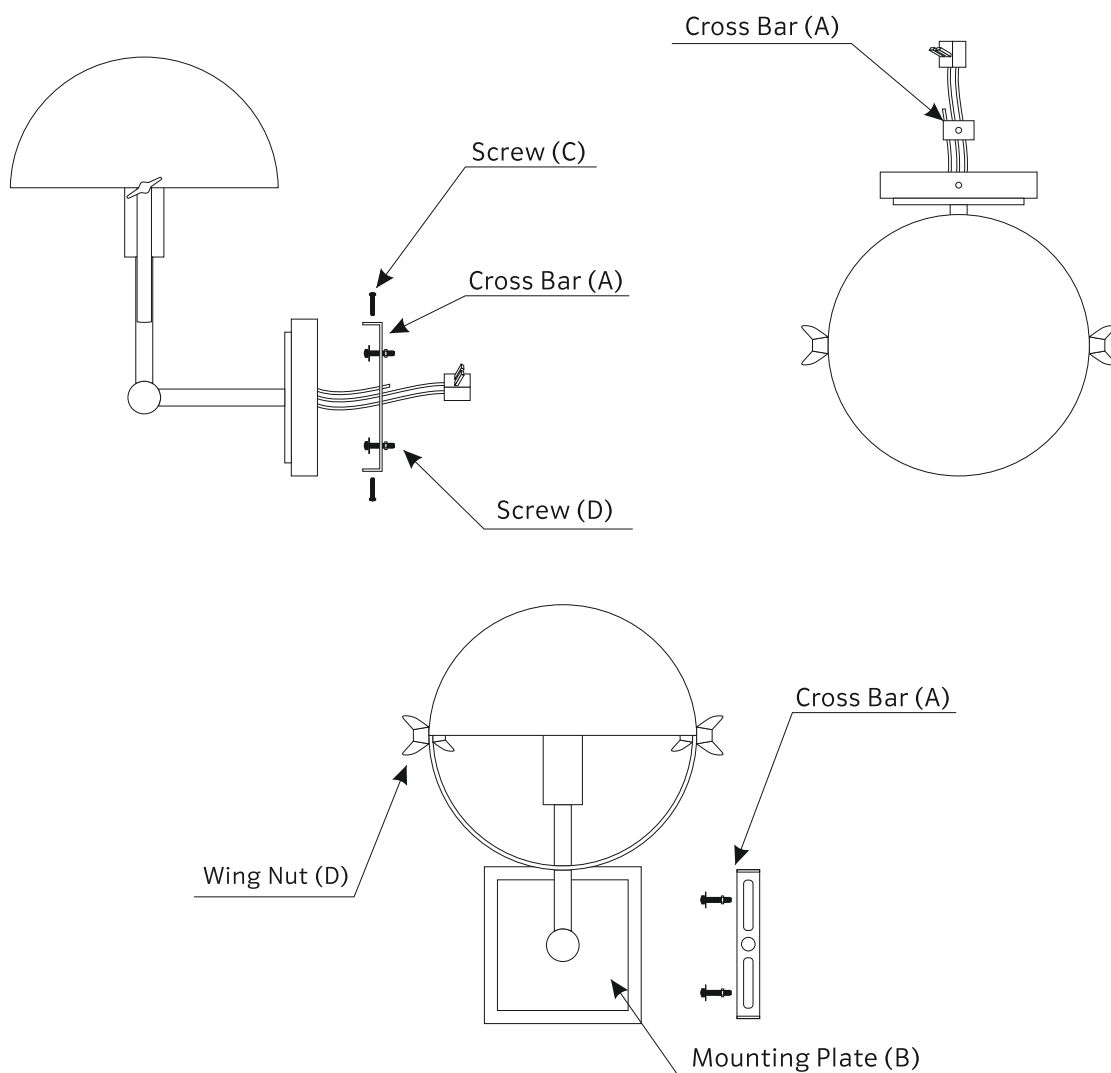- Shut off electrical supply at main fuse box / circuit breaker.
- Remove all parts from carton. Do not throw away any parts.
- Affix the **Cross Bar (A)** directly to the Junction Box using **Screws (D)** provided. .
- Assemble the wires at the back of the **Mounting Plate (B)**.
- Connect the wires from the sconce to the wires in the junction box, neutral to neutral, live wire to live wire.
- Fix the **Mounting Plate(B)** on the **Cross Bar (A)** by tightening the **Screw(C)** after matching the holes of **Mounting Plate(B)** over the **Cross Bar(A)**.
- To adjust the lamp holders in vertical position loosen and tighten the two **Wing Nuts(D)**.
- Insert 25-watt Type B bulbs (not included) into Threaded sockets.
- Installation is complete.



### PLEASE NOTICE!

If the external flexible cable or cord of this wall light is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

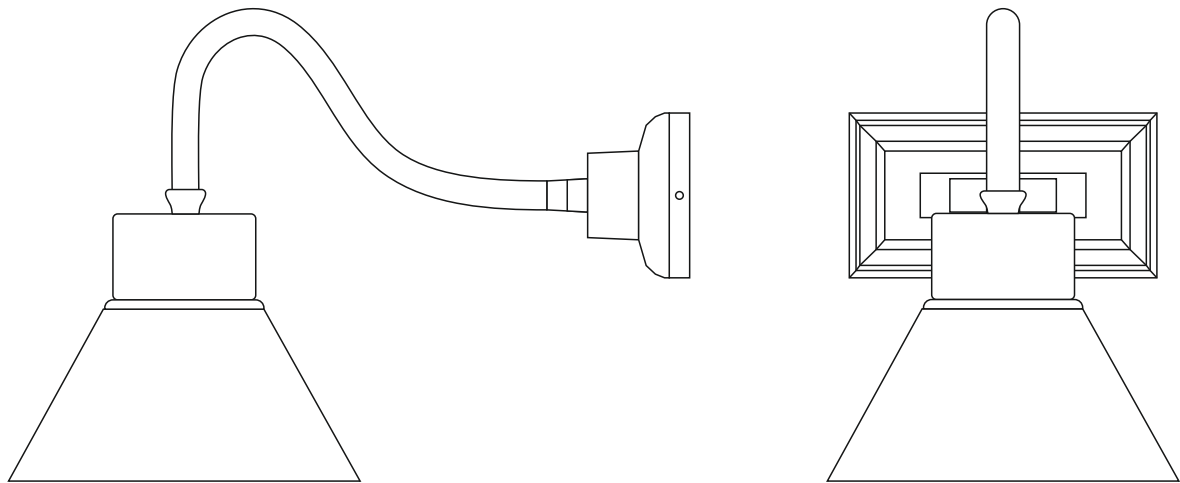
### CARE INSTRUCTIONS:

To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.

  
**LIGHTING**  
M I N D T H E G A P

**NEWPORT SCONCE**  
INSTALLATION GUIDE

---







**IMPORTANT SAFETY INSTRUCTIONS:**

- These instructions are provided for your safety. It is very important that they are properly read completely before beginning the installation of your fixture.
- Turn off power before replacing the bulb, making sure, the bulb had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.

**DIRECT WIRE FIXTURE:**  
**WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN**


**PARTS ENCLOSED**

| Cross Bar (A)                                                                       | Mounting Plate (B)                                                                  | Screws (C)                                                                          | Screws (D)                                                                            | Quick connector                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |

---

### TO ASSEMBLE:

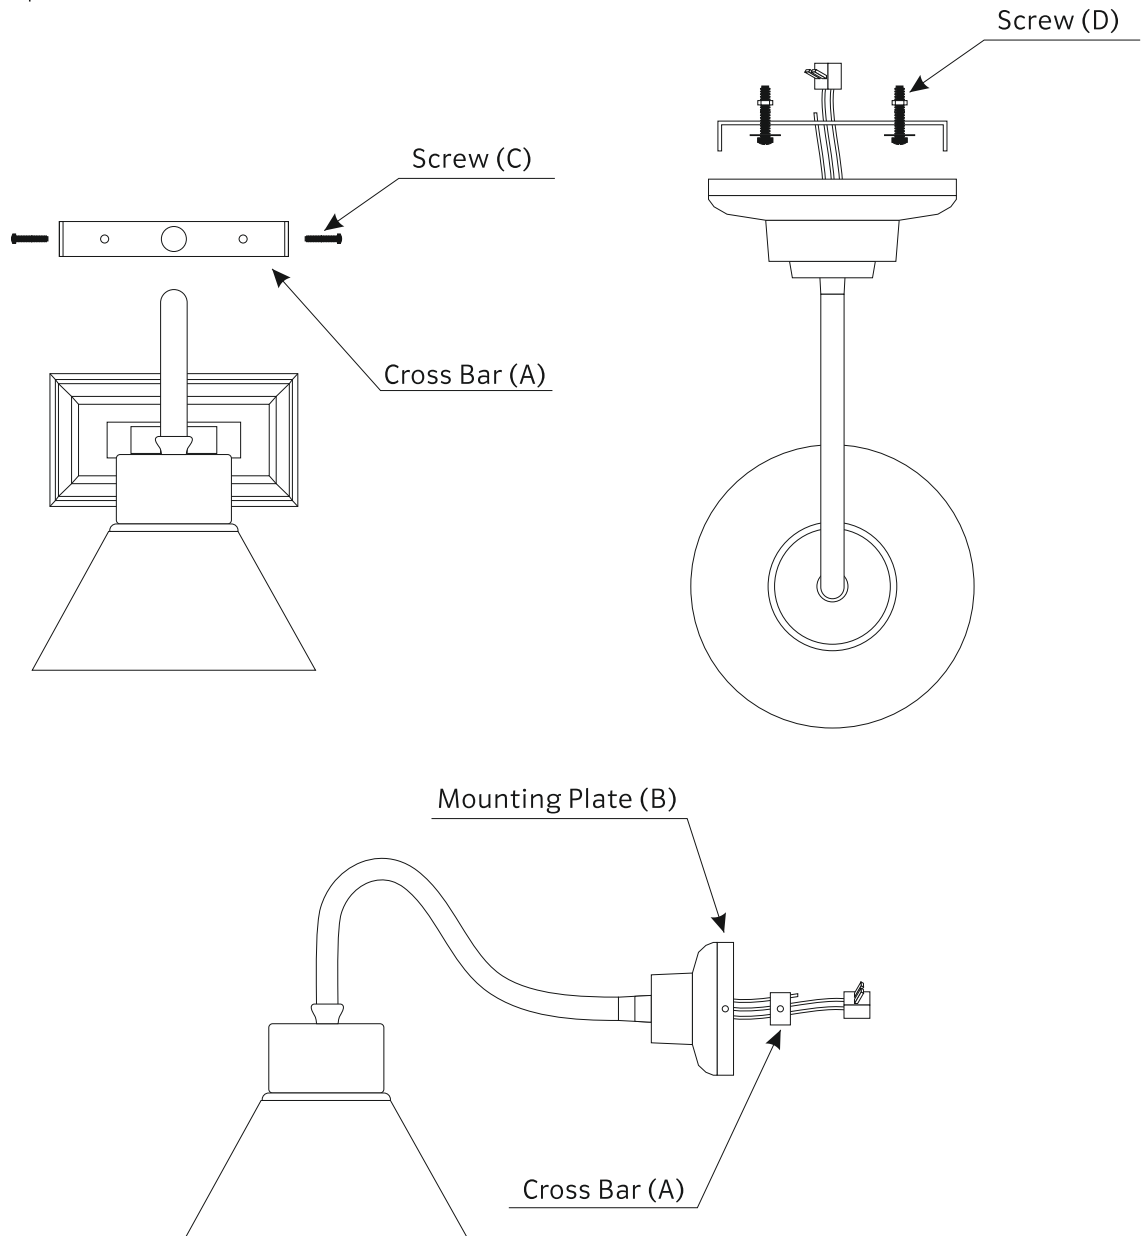- Shut off electrical supply at main fuse box/ circuit breaker.
- Remove all parts from carton. Do not throw away any parts.
- Affix the **Cross Bar (A)** directly to the Junction Box using **Screws (D)** provided. .
- Assemble the wires at the back of the **Mounting Plate (B)**.
- Connect the wires from the sconce to the wires in the junction box, neutral to neutral, live wire to live wire.
- Fix the **Mounting Plate(B)** on the **Cross Bar (A)** by tightening the **Screw(C)** after matching the holes of **Mounting Plate(B)** over the **Cross Bar(A)**.
- Insert 25-watt Type B bulbs (not included) into Threaded sockets.
- Installation is complete.



### PLEASE NOTICE!

If the external flexible cable or cord of this wall light is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

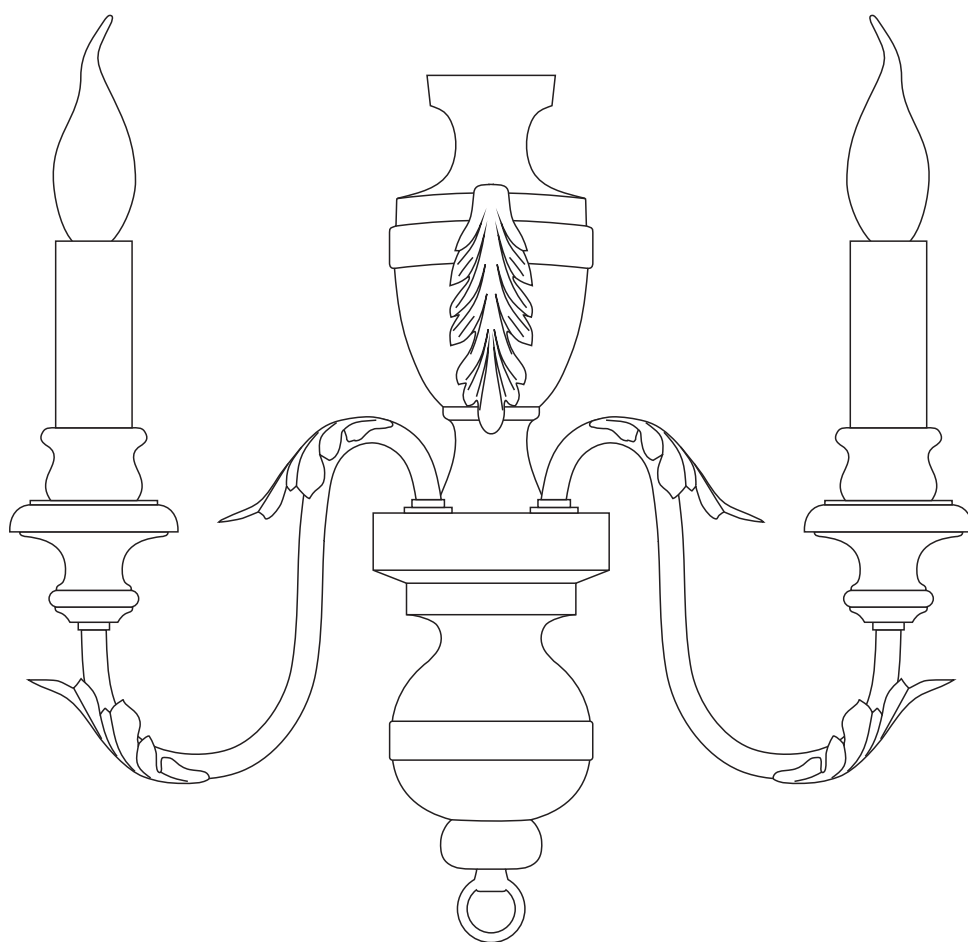
### CARE INSTRUCTIONS:

To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.

  
**LIGHTING**

**EMILE Double Arm Sconce  
in Emerald Green\Antique Pink Resin**  
INSTALLATION GUIDE

---



**IMPORTANT SAFETY INSTRUCTIONS:**

- These instructions are provided for your safety. Please study them carefully before attempting installation and retain them for future reference.

**DIRECT WIRE FIXTURE:**  
**WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN**

## SAFETY INFORMATION:

- If you are in any doubt about the installation of electrical products consult a qualified electrician.
  - This light fitting should be installed in accordance with IEE Wiring Regulations and the Building Regulations.
  - To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
  - To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
  - This light fitting is Class I = ⚡ and should be installed to a lighting supply (with earth) protected by a 5 amp fuse or equivalent circuit breaker.
  - Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
  - When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling.
- Dispose of used bulbs carefully.

## TO ASSEMBLE:

- Ensure that the main electricity supply is switched off at the fuse board.
- If removing an existing fitting, carefully note the position of each set of cables.
- Remove the screws holding the metal wall fixing bracket to the fitting.
- Offer the fixing bracket to the wall near to where the cable exits and mark the position of the two fixing holes, ensuring that the bracket is truly vertical. Drill the fixing holes taking care not to damage any hidden wires.
- Firmly attach the fixing bracket to the wall using the plastic plugs and screws provided, ensuring that no wires are trapped.
- Make the electrical connections as follows (see diagram). Use a screwdriver to lever open the connector block housing, then feed supply cable through rubber sleeving and make electrical connections as follows:
- Please ensure there is enough of a cavity to house the connections.

Then connect fitting wires into the gated side of terminals whilst observing 'L-E-N' embossed inside casing. Feed the supply cable through the rubber sleeve:

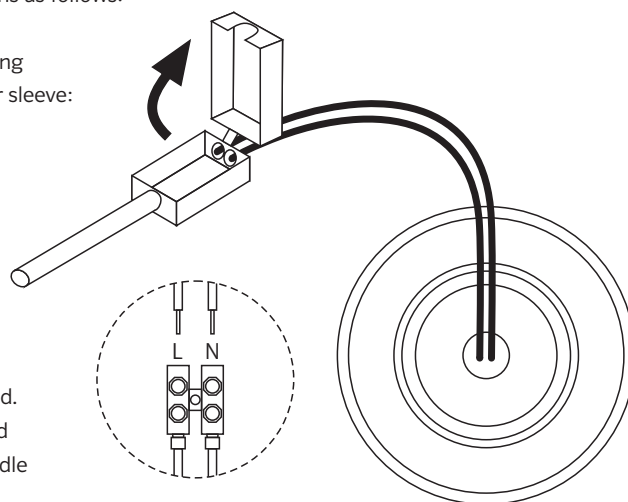
Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.

Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.

Ensure electrical connections are tight and no loose strands of wire protrude from the terminal block.

Make sure the metal terminals and rubber sleeve are correctly seated then close connector block cover by snapping back together.

- Attach the fitting to the wall bracket using the screws previously removed.
- Where required: remove shade ring from fitting then fit shade / glass and secure into position using shade ring. Some fittings may only require candle drip(s) fit these over bulb holder.
- **Fit the bulb:** Type and wattage as indicated on the fitting.  
**Do not exceed the stated wattage.**
- Switch on the electricity at the fuse board. Your fitting is now ready to use.



## OTHER INFORMATION:

\*\*The use of gloves is advisable when handling polished surfaces to avoid premature tarnishing. \*\*

Consult care tag included for cleaning and care of the product.

## PLEASE NOTICE!

If the external flexible cable or cord of this wall light is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

## CARE INSTRUCTIONS:

To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.

